

531, 15 F

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number
WO 2004/035446 A1

(51) International Patent Classification⁷: **B65H 67/04**,
D02J 1/08, D02G 1/16, 3/32

[—/—]; C/O Giudici S.P.A., I-23856 Sala al Barro Galbi-
ate (IT).

(21) International Application Number:
PCT/IT2003/000633

(74) Agent: **MANNUCCI, Gianfranco**; c/o Ufficio Tecnico
Ing. A. Mannucci S.R.L., Via della Scala, 4, I-50123
Firenze (IT).

(22) International Filing Date: 16 October 2003 (16.10.2003)

(81) Designated State (*national*): US.

(25) Filing Language: English

(84) Designated States (*regional*): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(26) Publication Language: English

(30) Priority Data:
EP 02 42 5632 17 October 2002 (17.10.2002) EP

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments


(71) Applicant (for all designated States except US): **GIUDICI**
S.P.A. [IT/IT]; Via San Galdino 6, I-23856 Sala al Barro
Galbiate (IT).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(72) Inventor; and

(75) Inventor/Applicant (for US only): **GRASSI, Nerino**

(54) Title: METHOD AND DEVICE FOR THE PRODUCTION OF COVERED ELASTIC YARN AND FOR AUTOMATICALLY REPLACING FEEDING SPOOLS

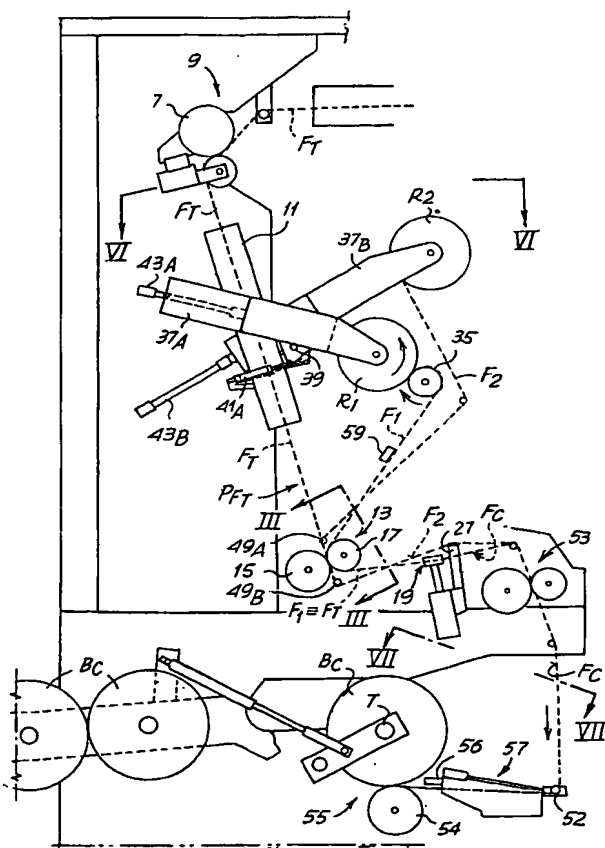

(57) Abstract: The device comprises in combination: an inter-
lacing jet (19) for reciprocally joining the covering yarn (FT)
and the elastic yarn (F1, F2); supporting means (37A, 37B) for
spools of elastic yarn (R1, R2); winding members (54, 55, 56)
for winding the composite yarn (FC) on a developing cop (BC);
a device (57) for interrupting the feeding of composite yarn (FC)
to said developing cop (BC) and starting the winding of the com-
posite yarn on a new winding tube (T). The supporting means
(37A, 37B) for the spools of elastic yarn are suitable for arrang-
ing at least one first spool of elastic yarn (R1) in a working posi-
tion and at least a second spool (R2) of elastic yarn in a standby
position and for transferring said second spool from the standby
position to the working position. Furthermore, a retaining mem-
ber (27) is arranged near said interlacing jet (19) to withhold an
initial free end of the elastic yarn of said second spool (R2) in
standby position. Means for introducing the elastic yarn of said
second spool (R2) in said interlacing jet (19) are also provided.

WO 2004/035446 A1

DescriptionMETHOD AND DEVICE FOR THE PRODUCTION OF COVERED ELASTIC
YARN AND FOR AUTOMATICALLY REPLACING FEEDING SPOOLSTechnical field

5 The invention relates to a method and a device for the production of composite yarn of the type comprising a core, consisting of at least one elastic yarn, and an external coating, consisting of at least a covering or coating yarn, which is essentially not elastic or which is less elastic than the core.

More specifically, the invention relates to a method and a device for
10 automatically replacing spools of elastic yarn which are finished or nearly finished.

Background Art

Composite elastic yarns, including an inner elastic yarn, such as e.g. a single filament yarn, of so-called Lycra[®], elastan or other polyurethane fibers or the
15 other, are frequently used in the production of fabrics and particularly knitwear, such as, for example, hosiery. The elastic yarn is covered by a less elastic yarn, which may be considered essentially not elastic, such as, for example nylon[®], or other polyamide, polyester or equivalent, typically with a multiple filament structure, i.e. a yarn made of a plurality of strands. This yarn
20 will hereof be called "covering yarn" because it is used to form a sort of coating or covering of the elastic yarn.

The covering of the elastic yarn may be obtained by means of a spiraling process in which the elastic yarn is covered with a helical winding of covering yarn. This process is extremely costly and slow.

25 A new process of covering or coating elastic yarn has been recently affirmed. This process - known as "interlacing" or "air covering" - consists in using a pneumatic device, commonly called an interlacing jet with a conduit crossed by two yarns (the covering yarn and the elastic yarn). A pressurized air nozzle lets a jet of compressed air into the conduit. The turbulence generating inside
30 the conduit interlaces the covering yarn around the elastic yarn. Devices and methods based on this technology are described in US-A-6,393,817, US-A-5,008,992, US-A-4,829,757, US-A-3,940,917.

This technology employs pneumatic systems originally developed for machining multiple filament threads to increase bulk and entangle the

individual filaments forming the yarn. Examples of interlacing jets developed for this application and used to interlace elastic or elastomeric yarns with covering or coating yarns are described in US-A-5,970,593, US-A-5,146,660, US-A-5,010,631, US-A-4,4307,80, EP-B-564400, JP-A-3,279,437.

- 5 The spools of elastic or elastomeric yarn used in systems for the production of covered elastic yarn contain much less yarn than that of the spools or cops of covering yarn. Typically, the elastic yarn on one spool is sufficient for producing a single cop of composite yarn while the covering yarn on one cop is sufficient to make several cops of composite yarn. This means that the
- 10 spools of elastic yarn must be changed frequently between two subsequent covering or coating yarn cop changes. Replacement is manual. In a system generally equipped with a plurality of heads, each producing a cop of composite yarn, sensors are provided to stop head operation when the respective elastic yarn spool is finished. The operator must intervene to
- 15 manually replace the ended spool of elastic yarn, and introduces the free end of the new elastic yarn in the interlacing jet to start the winding cycle of a new composite yarn cop. In the case of manual systems, the operator must also replace the completed cop with a new tube on which the new composite yarn is wound. Covering yarn output is stopped during this time.
- 20 This operative mode has considerable problems. Firstly, the downtime is long because a single operator must monitor a high number of working heads and a considerable time may elapse from the end of the spool of elastic yarn and the intervention of the operator so that the head can resume the winding cycle. Furthermore, specifically to avoid excessive machine downtime, the
- 25 spools of composite yarn may be replaced before they are completely finished. The residual yarn cannot be used. This means that a not negligible quantity of elastic yarn is wasted, which is a considerable problem considering the high cost per length of this material.

On the other hand, it is not possible for the operator to arrange a spare spool

30 of composite yarn and join the head or initial free end of the yarn on the spare spool to the tail of the yarn on the spool being processed, which would mean that the spool change would be prepared well before it ends and the entire spool would be used up. This operation is impossible because in known machines the spools of elastic yarn are not unwound by keeping them

- stationary, but are turned on their axis to unwind the yarn. Consequently, it is impossible for the operator to grasp the end or tail of the spool being processed and join it to the beginning of the yarn on the spare spool. This problem does not occur with the replacement of covering yarn cops because
- 5 the cops are unwound without turning them on their axes. Consequently, the head-tail of the yarns wound on cops intended to be unwound in sequence can be joined to ensure continuous covering yarn feeding. Furthermore, the cops of covering yarn contain a large amount of yarn and the joining operations can be carried out after a considerable amount of time.
- 10 Covering yarn texturing devices may be arranged between the yarn feeding cop and the interlacing jet are provided in some plants (see US-A-6,393,817 and US-A-5,008,992 in particular). The texturing devices comprise an oven crossed by covering yarn. This means that the yarn must be fed continuously. Indeed, stopping also only temporarily the yarn in the oven would cause
- 15 destruction or unacceptable damage thereof. The covering yarn must be cut upstream of the texturing section, i.e. upstream of the oven, when the head is stopped, also only for a short time, for the operator to replace the completed elastic yarn spool. The operator re-threads the covering yarn along the entire path from the cop to the interlacing jet when the composite yarn forming head
- 20 can start again after completing the operations needed to replace the spool and insert the free end of the elastic yarn in the interlacing jet. This entails a long downtime and loss of production. The problem can only be avoided if the operator is capable of intervening promptly to replace the spool of elastic yarn before the machine automatically cuts the covering yarn. Since a single
- 25 operator is in charge of monitoring a high number of heads which cannot be synchronized, performing this operation in a sufficiently timely way on all heads in the system is never possible. Employment of a higher number of operators on the other hand would cause an unacceptable increase in the cost of labor.
- 30 Disclosure of Invention
- Object of the present invention is a method for automatically replacing spools of elastic yarn in devices for the production of covered elastic yarn, i.e. composite yarn comprising an elastic core and a covering formed by one or more covering yarns.

According to a different aspect, object of the present invention is a device for the continuous production of cops of composite yarn with automatic replacement of the elastomer spools without needing to interrupt the covering yarn.

- 5 These and other objects and advantages, which will be clear to experts of the field in the text that follows, are obtained in practice by a method comprising the following phases:
- a. arranging a first spool of a first elastic yarn in a working position and feeding said first yarn to an interlacing jet where it is covered with said
10 covering yarn to produce said composite yarn which is wound on a developing cop;
 - b. arranging a second spool of a second elastic yarn in a standby position;
 - c. when the first spool of composite yarn must be replaced with the
15 second spool of composite yarn, interrupting composite yarn feeding to said developing cop, replacing the developing cop with a new tube;
 - d. inserting said second elastic yarn in said interlacing jet to resume therewith the formation of said composite yarn, said second spool of elastic yarn starting to feed elastic yarn to said interlacing jet and being
20 carried to said working position, if needed, and said second elastic yarn being joined to said covering yarn which moves continuously;
 - e. starting winding composite yarn on said new tube;
 - f. if needed, collecting at least the covering yarn fed via said interlacing jet between the winding interruption of the developing cop and the start
25 of winding of the composite yarn on said new tube.

Feeding of the yarn is preferably obtained by keeping the spool in rotation by suitable means, such as a rotating roller.

It should be understood that said phases can be carried out in the specified order or in a different sequence. The composite yarn can be aspirated
30 between the end of the winding of a complete cop and the start of the winding a new cop of composite yarn, if the elastic yarn has not yet finished, or only the covering yarn if the elastic yarn is finished up. Generally, the elastic yarn may end either before or after interrupting winding of the completed cop, since the last turns form a reserve which is intended to be eliminated and which for

this reason may be formed by incomplete yarn, i.e. covering yarn only.

The phases above may also not be performed each time a complete cop is replaced with a new tube because the elastic yarn of a single cop may suffice for two (or more) cops of interlaced or composite yarn. In this case, the cycle
5 (consisting of cutting the yarn, replacing the complete cop with a new tube and starting winding on the new tube) is started by means of a sensor for detecting the amount of yarn wound on the final cop by detecting the weight and/or the length of the material.

With the method according to the invention, the leading end of the yarn on the
10 standby cop is arranged by the operator in any instant and withheld for example by a retainer member which releases it to start a new composite yarn cop production cycle when the spool in working position is finished. The spool replacement procedure is automatic, with the exception of spool positioning in standby position and arrangement of the leading end in the retaining member;
15 these operations may easily be carried out by a single operator also on a high number of working heads, considering the long time available before a spool of elastic yarn is finished up. The position of the two spools of elastic yarn may be reversed upon end of the first elastic yarn and beginning of the feeding of the second elastic yarn. However, two fixed positions might also be
20 foreseen for the two spools of elastic yarn.

In principle, the second elastic yarn can be joined to the covering yarn which is fed continuously without interruptions also upstream of the interlacing jet with a interweaving or joining system, e.g. with an auxiliary interlacing jet or other pneumatic system which is operated only during the spool changing
25 phase and is arranged upstream of the interlacing jet which forms the composite or interlaced yarn.

Preferably, however, the second elastic yarn is joined to the covering yarn in the same interlacing jet where the elastic yarn is covered with the covering yarn. For this purpose, the free leading end of the second elastic yarn is
30 withheld downstream to the interlacing jet, so that with a simple traversal movement said second yarn can be inserted in the jet and arranged alongside the covering yarn. The very action of the interlacing jet joins the two yarns and the second elastic yarn starts to be dragged along the path to the winding area of the cop by the covering yarn which is intact and which continues to be

fed to the winding area without interruption.

The covering yarn can be a multiple filament yarn, and specifically a textured multiple filament yarn, in a way known per se. Texturing can be carried out preferably in line, i.e. upstream of the interlacing jet, along a feeding path
5 between the covering yarn cop and the interlacing jet. With an arrangement of this kind the invention offers the considerable advantage of avoiding the need to re-introduce the covering yarn through the texturing path following cutting of the yarn when the spools of elastic yarn are finished up.

In principle, the replacement cycle of the first spool of elastic yarn with the
10 second spool of elastic yarn and the replacement of the formed composite yarn cop with a new winding tube can be started either by defining the amount of wound yarn or the amount of elastic yarn unwound from the spool. This however may cause the incomplete unwinding of spools of elastic yarn. Preferably, therefore, the end of the first elastic yarn of the first spool is
15 detected and the beginning of the automatic replacement cycle occurs following a signal generated by said detection. Any system for detecting the end of the yarn may be employed.

The covering yarn is fed continuously also during the elastic yarn spool replacement phase and when the finished cop is replaced with a new winding
20 tube. The covering yarn which is fed during the exchange phase can be collected pneumatically via a suction mouth or in other way, e.g. by winding. This yarn is rejected but the cost is limited because the cost per unit length of the covering yarn is considerably low.

Additional advantageous characteristics and embodiments of the method
25 according to the invention are recited in the annexed dependent claims.

The invention also concerns a device for the production of composite yarn consisting of at least one elastic yarn covered with at least one covering yarn, of the type comprising in combination:

- an interlacing jet for reciprocally joining the covering yarn and the
30 elastic yarn;
- a feeding path of said covering yarn and a feeding path of said elastic yarn to said interlacing jet;
- supporting means for spools of elastic yarn;
- winding members for winding the composite yarn on a developing

cop;

- a device for interrupting the feeding of the composite yarn to said developing cop and starting the winding of the composite yarn on a new winding tube.

5 According to the invention the device is characterized in that: said supporting means for the spools of elastic yarn are suitable for arranging at least a first spool of elastic yarn in a working position and at least a second spool of elastic yarn in a standby position and for transferring said second spool from the standby position to the working position and vice versa if so required; a
10 retaining member is arranged near said interlacing jet to withhold an initial free end of the elastic yarn of said second spool in standby position; means for introducing the elastic yarn of said second spool in said interlacing jet are provided; and, preferably, said interrupting device is associated to a covering yarn collection member which is fed essentially continuously while the
15 complete cop of composite yarn is replaced with a new winding tube.

The means for supporting the spool of elastic yarn may provide for rotation of the spool around its own axis, if so required. Alternatively, the spool may be unwound by drawing the yarn with the spool kept in a non-rotating position. If the spool is rotating during pay-off of the yarn, a rotating means is provided in
20 the working position of said spool.

Advantageously, at least one texturing station is arranged along the feeding path of the covering yarn.

According to an advantageous embodiment of the device, in order to join the covering yarn (which is continuously fed) by means of the interlacing jet to the
25 leading end of the yarn coming from the second spool, it is foreseen that the retaining member of the free leading end of the elastic yarn of said second spool is combined with a means for inserting said yarn in the interlacing jet, and is arranged downstream of said jet with respect to the direction of advancement of the yarn.

30 The means for inserting the yarn in the interlacing jet may be formed by the mobility of the retaining member. In other words, the retaining member can be provided with a movement for inserting the elastic yarn in the interlacing jet. Alternatively, the means for inserting the yarn in the jet may comprise a separate introducing member which cooperates with the retaining member,

which can in this case also be fixed. If the covering yarn and the elastic yarn are joined upstream of the interlacing jet, the introducing means of the elastic yarn in the interlacing jet is represented by the covering yarn and by its movement along the feeding path.

- 5 Additional advantageous characteristics and embodiments of the device according to the invention are recited in the annexed dependent claims.

Brief description of the drawings

The invention will be better understood by following the description and the annexed drawing, which shows a practical and non restrictive embodiment of the invention. More specifically in the drawing, where identical parts are indicated by the same reference numerals:

- 10 Fig. 1 is a lateral view of a portion of the system for producing composite yarn showing a winding head with the respective covering yarn texturing section;
- Fig. 2 is a magnified lateral view of the interlacing area with the system for replacing the spools of elastic yarn and the composite yarn cop winding area;
- 15 Fig. 3 is a view according to III-III in Fig. 2 of the stretching area with the stretching rollers for the elastic yarn and covering yarn;
- Fig. 4A and 4B are a magnified views of the interlacing jet, the retaining member of the initial free end of the elastic yarn of the standby spool and the
- 20 introducing means of said elastic yarn in the interlacing jet in two different positions;
- Fig. 5A and 5B are views according to V-V in Fig.4A, 4B in two different positions;
- Fig. 6 shows a view according to VI-VI in Fig. 2 of two arms for supporting the
- 25 spools of elastic yarn;
- Fig 7A, 7B and 7C show the device which interrupts the feed of interlaced yarn to the finished cop and launches the winding of a new cop in three different working positions; and
- Fig. 8 shows the movement of the system for supporting the spools of elastic
- 30 yarn.

Modes for Carrying out the Invention

Fig.1 shows a lateral view of a system comprising a plurality of winding heads for the production of cops of composite yarn with a set of devices according to the invention. Reference numeral 1 generically indicates the area where the

- cops B1 of covering yarn, e.g. polyester, nylon or other equivalent yarn, typically a multiple filament yarn; are arranged. The yarn unwound from a cop B1 is fed through a texturing section of the traditional type, known per se, and indicated by reference numeral 3. The texturing area has a heating oven 5, a cooling area 6, a false-twisting section 8, and ends with a pair of rollers 7 for taking the textured covering yarn FT; the covering yarn is fed to an area 9 where the spools of elastic yarn, the interlacing jet, the winding head itself and all the members needed to change the spools of elastic yarn are arranged. This area is shown in greater detail in Fig. 2.
- 10 The yarn FT in area 9 may cross an oven 11 (for stabilization purposes) and along its feeding path Pft reaches a stretching area 13, where a stretching unit is arranged, which is formed by a pair of rollers 15, 17, the first of which is driven and the second is idle. An interlacing jet, generically indicated by reference numeral 19 and which may be of a type known per se and which is shown in greater detail in Fig. 4A, 4B and 5A, 5B, is arranged downstream of the stretching unit 15, 17. It comprises a through conduit, in which the yarn FT slides, provided in a body 21 equipped with a closing covering 23. The cover can be lifted and lowered by means of an oscillating movement controlled by an actuator 25 to open and close an insertion slit for introducing the yarn in the channel of the interlacing jet 19. The closing position of the cover 23 is shown in Fig. 4A and 5A, while Fig. 4B and 5B show the jet 19 with the cover 23 open.
- As shown again in detail in Fig. 4A, 4B and 5A, 5B, next to the interlacing jet a retaining member 27 is arranged comprising a suction mouth which is used to engage and withhold the initial free end of the elastic yarn wound on the second spool of elastic yarn which is in standby position, as will be described below. A mechanical gripping member may be arranged inside the suction mouth (not shown), e.g. elastic tongs or the like, which fastens the free end of the yarn once it has been sucked into the mouth of the retaining member 27.
- 30 The suction mouth 27 is arranged with respect to the direction of feeding of the yarn crossing the interlacing jet downstream of the interlacing jet. An introducing means 29, used to introduce the initial portion of the elastic yarn of the standby spool into the interlacing jet 19 in the way described below, is arranged between the mouth 27 and the interlacing jet 19. The introducing

means 29 presents a pivoting arm 31 with a V-shaped end 31A for engaging the elastic yarn. The pivoting movement of the introducing means is controlled by a cylinder-piston actuator 33; the two end positions of the introducing means are shown in Fig. 4A, 5A and 4B, 5B, respectively.

- 5 A first elastic yarn F1, unwound from a first spool R1 of elastic yarn is fed through the nip defined by the stretching rollers 15, 17 forming the stretching unit 13. The spool R1 is unwound from a driven unwinding roller 35 with which it is in contact. The speed of the unwinding roller 35 and of the rollers 15, 17 is adjustable to apply the required degree of stretching to the yarn F1.
- 10 Additionally, the speed of the rollers 15, 17 can be adjusted with respect to the speed of the pair of rollers 7, so to apply a degree of stretching to the yarn FT which is either equal to or different than the stretching applied to the yarn F1, or relieve the yarn FT.

The spool R1 is supported by an arm 37A pivoting on an axis 39 which is
15 orthogonal to the plane of the figure. In addition to the pivoting movement, controlled by a cylinder-piston actuator 41A, the arm 37A is provided with a translating movement in a direction which is parallel to the longitudinal development of the arm, controlled by an additional cylinder-piston actuator 43A. An additional arm 37B, which is essentially the same as the arm 37A, is
20 pivoted on the same axis 39, and its pivoting movement about axis 39 is controlled by an additional cylinder-piston actuator 41B, similar to the actuator 41A; its translation movement parallel to the longitudinal development thereof is controlled by an actuator 43B, similar to the actuator 43A.

Fig. 6 shows a plan view of two arms 37A, 37B which, for the sake of
25 simplicity and clarity of drawing, are shown in the parallel and specular position, i.e. in an angular position which is different from that shown in Fig. 2. Fig. 6 shows a plate 45A, 45B, for each of the arms 37A, 37B respectively, which pivots on axis 39 and supports the actuator 43A, 43B and translation guiding means of the arm 37A, 37B.

- 30 The pivoting arm 37B supports a second spool R2 on which a second elastic yarn F2 is wound. The spool R2 is shown in the standby position (in Fig. 2) to replace the spool R1 when the latter is finished. The yarn F2 is arranged along a standby path which leads downwards from the spool R2 to the side of the stretching area 13. The head or initial free end of the second elastic yarn

F2 is withheld by the retaining member 27. As appears in Fig. 3, the second yarn F2 is withheld in the stretching area 13 in two points by an inserting element 49A, 49B, so to form a straight section arranged on the side of the nip between the rollers 15, 17, which is to be inserted into said nip with a movement of the inserting element 49A, 49B controlled by the actuators 51A, 51B in the instant in which the spool R1 shall be replaced by the spool R2.

Downstream of the stretching unit 15, 17, the two yarns F1 and FT follow a common path to the interlacing jet 19, inside which the elastic yarn F1 is covered with the yarn FT to form a composite or interlaced yarn FC in a way known per se. The composite yarn FC reaches a feeding unit 53 comprising a driven roller and an idle roller downstream of the interlacing jet 19. The yarn FC is deviated and guided by a fork 52 downstream of the feeding unit and reaches a winding area, indicated by reference numeral 55 as a whole, where it is wound on a winding tube T to form a cop BC of composite yarn.

Mechanisms (which are known per se and not described herein) arranged in the winding area 55 progressively and automatically unload the formed cops BC and replace the completed cops BC with new winding tubes T. Reference numeral 57 generically indicates a device which: interrupts the composite yarn FC after winding a cop BC; withholds by a suction mouth the yarn which continues to be fed during the phase in which the cop BC is replaced with a new winding tube T and the spool of elastic yarn R1 is replaced with the spool R2; and resumes winding of the yarn FC on the new winding tube T.

The device 57 is shown in greater detail in the views in Figs. 7A, 7B and 7C, in three different operating positions, according to VII-VII in Fig. 2. The device 57 in Fig. 7A is shown in standby position before starting to wind a new cop BC of interlaced yarn FC. Reference T indicates the tube which is used for winding and reference numeral 60 indicates a ring, known per se, which is coaxial to the tube T and used to start winding the yarn on the tube. The tube T and the cop BC being developed on the tube are turned by a driven roller 54 underneath (see Fig. 2), so to ensure a constant peripheral speed as the diameter of the developing cop changes. Reference numeral 56 indicates a thread guide or "transverse" which distributes the turns of yarn on the tube T and on the spool BC developing on the tube according to an oscillating or translating movement shown by the double arrow f56.

The device 57 includes an arm 62 pivoting on an axis 64 approximately orthogonal to the plane of Figs. 7A, 7B, 7C; the arm carries a frontally open suction conduit, indicated by reference numeral 66, a fork 68, which translates according to f68 along the arm and in parallel to the suction conduit 66, and a
5 guiding member 70 which is integral with the conduit 66, to approach the yarn to the mouth of the suction conduit 66.

In the position shown in Fig. 7A, the yarn FC is sucked into the conduit 66. During this phase, the yarn may actually only be the covering yarn FT and not the interlaced yarn FC, because the elastic yarn F1 or F2 (previously fed by
10 the corresponding spool R1 or R2) ends during this phase while the yarn FT is continuously fed also without the elastic yarn F1 or F2. If, however, as mentioned above, the cop BC is replaced with a new winding tube T before the spool R1 or R2 of elastic yarn is finished up (because the spool has an amount of yarn sufficient to produce, for example, two cops of composite yarn
15 FC), the device will suck composite yarn inside the conduit 66 while replacing the cop BC with the tube T until the new winding operation is started.

After inserting the elastic yarn through the interlacing jet 19 and complete interlaced yarn FC is again fed by said jet (after replacing the finished spool R1 of elastic yarn F1 with the spool R2 of elastic yarn F2 in standby position)
20 winding of the interlaced yarn on the new tube T can start, said tube for this purpose being turned on its axis. The yarn FC is approached by the fork 68 to the ring 60, which integrally turns with the tube and grips the yarn to wind it around the tube. The approach phase of the yarn FC to the ring 60 is shown in Fig. 7B. While the yarn forms the first winding turn on the tube T, a blade
25 (not shown) cuts the yarn to separate it from the portion which is inside the suction conduit 66. This generates a free end of the yarn which remains anchored to the tube by effect of winding. By continuing winding of the yarn FC on the tube T, the path of the yarn FC between the guiding fork 52 and the tube T is intercepted by the thread guide 56 which engages the yarn and
30 consequently starts distributing it along the entire axial development of the tube with an alternating movement according to the double arrow f56.

After winding a cop BC on the tube T, the arm 62 is brought to the position shown in Fig. 7C with the guiding member 70 arranged so to intercept the path of the yarn FC reciprocatingly guided by the guide thread 56. The guiding

member 70 presents a slanted surface 70A which forces the intercepted yarn FC to be raised to the mouth of the suction conduit 66. At the same time, the yarn FC is cut by a blade (not shown and carried by thread guide 56) in an intermediate position between the finished cop and the guiding member 70.

- 5 The free end downstream of the cut is wound on the cop BC which is then removed, while the free end upstream to the cut is inserted in the suction conduit 66, which (as described above) starts to suck the yarn; the yarn is continuously fed while the spool of elastic yarn is changed and the complete cop BC is replaced with a new tube. From this position, the arm 62 returns to
- 10 the position in Fig. 7A waiting for a new winding process to be started as soon as the interlacing jet 19 resumes outputting the complete yarn FC, i.e. after feeding of new elastic yarn F2 is started.

Global operation of the device described hereof is illustrated below. In the configuration shown in Fig. 2, the covering yarn FT (textured upstream of the roller pair 7) is fed to the stretching unit 15, 17 and from here to the interlacing jet 19. In parallel thereto, the elastic yarn F1, fed by the spool R1 which is turned by the unwinding roller 35, is fed to the stretching unit 15, 17 and then to the interlacing jet 19. The composite yarn FC is wound on the cop BC developing on the winding tube T supported by arms 56 in the winding area

20 55. The second elastic yarn F2 is in standby position with the initial free end engaged by the retaining member 27.

The spool changing phase is started when the end of the first elastic yarn F1 fed by the spool R1 is detected by a sensor 59 arranged between the unwinding roller 35 and the stretching area 13. During this phase, the textured covering yarn FT continues to be fed without stopping, preferably at a substantially constant speed. The sensor 59 can be replaced by another type of sensor, e.g. for detecting the diameter of the finishing spool R1 or the amount of fed yarn F1. A sensor detecting the amount of yarn wound on the cop BC, measured according to weight and/or length, may be combined to the

25

30 sensor 59 or other equivalent device. Such additional sensor may be used to start the replacement process also before the yarn F1 ends but the cop BC is completed.

The following operations are carried out during the exchange phase. The composite yarn FC is cut between the completed cop BC and the device 57,

forming and end or tail which is completely wound on the cop. The other free end formed by the cut is withheld by the device 57 and sucked by the suction mouth 66 as described above with reference to Fig. 7A-7C, and prepared to start new winding. In this way, the end part of the elastic yarn F1 and the covering yarn FT, which continues to be fed continuously, are sucked by the suction mouth and the yarn FT is kept adequately taut along the entire path thereof.

The arms 37A and 37B (and consequently the finished spool R1 and the standby spool R2 of elastic yarn) are exchanged so that the arm 37A with the finished spool R1 is up and the arm 37B with the spool R2 previously in standby position down; the spool R2 is in contact with the unwinding roller 35. Fig. 8 shows the sequence of movement of the arm 37A. Positions can be exchanged without reciprocally interfering by coordinating the pivoting and translation movements of the two arms 37A, 37B. When arm 37A reaches the final position with the finished spool R1 up, the operator can (at any instant during the unwinding cycle of the spool R2) replace the finished spool R1 with a new spool of elastic yarn which will later be replaced similarly to spool R2 when it finishes in turn.

When the spool R2 is in condition to feed elastic yarn R2, the elastic yarn is translated from the position shown in Fig. 3 by the introducing element 49A, 49B, 51A, 51B to be introduced in the nip between the stretching rollers 15, 17, next to the yarn FT which continues to be fed through the stretching unit 15, 17. For this purpose, the rollers 15, 17 can be slightly moved apart to facilitate introduction of the elastic yarn F2.

Again during the changing phase, the interlacing jet 19 is opened by raising the closing cover 23 from the position shown in Fig. 4A, 5A to the position shown in Fig. 4B, 5B. The yarn FT continues to be fed continuously through the interlacing jet 19 while the initial part of the second elastic yarn F2 is introduced in the jet via the aperture opened by the cover 23 by the pivoting arm 31 of the introducing element 29, which is lowered, as shown in Fig. 4A, 4B and 5A, 5B. The cover 23 of the interlacing jet 19 is closed again after introducing the yarn F2 into the latter. The possibility of using an interlacing jet with a longitudinal gap open at all times (as shown, for example, in one of the patents mentioned in the preamble to this description) is not ruled out. In this

case, there is no need for the cover 23 and the respective opening and closing actuator.

The yarn F2 may be introduced in the interlacing jet 19 in different ways, for example, by arranging the retaining member 27 in a position vertically above
5 the interlacing jet 19. In this case, the yarn F2 can be introduced into the jet with a vertical movement. A thread guide downstream of the interlacing jet 19 will temporarily lower the trajectory of the yarn emerging from the jet.

The introduction of the initial part of the second elastic yarn F2 in the interlacing jet 19 next to the yarn FT, which continues to be fed to the jet,
10 makes the two yarns join automatically by effect of interlacing caused by the jet. In this case, there is no need for separate joining members, although the two yarns can be joined upstream to the interlacing jet 19. In this case, the yarn F2 is inserted in the jet by being pulled by the yarn FT to which it is previously joined. The means for introducing the yarn F2 in the interlacing jet
15 19, in this case, consist of the yarn FT and the joining system of the yarns F2 and FT.

Feeding of composite yarn FC resumes downstream to the interlacing jet 19 after introduction of the yarn F2. When the composite yarn reaches the device
57, the latter starts winding the yarn on a new winding tube T; the yarn is cut
20 and the suction of the yarn through the suction conduit mouth 66 ceases, as described in greater detail with reference to Fig. 7A-7C.

It is noted that the drawing shows a possible form of embodiment of the invention only and that numerous changes can be implemented without departing from the scope of the present invention. The presence of reference
25 numerals in the annexed claims has the purpose of facilitating comprehension of the claims with reference to the above description and annexed drawings and does not limit the scope of protection represented by the claims.

Claims

1. A method for producing a composite yarn (FC), comprising at least one elastic yarn (F1, F2) covered with at least one covering yarn (FT), and automatically replacing spools of elastic yarn characterized by:

- 5 a. providing a first spool (R1) of a first elastic yarn (F1) and feeding said first yarn to an interlacing jet (19) where it is covered with said covering yarn (FT) to produce said composite yarn (FC) which is wound on a developing cop (BC);
- b. providing a second spool (R2) of a second elastic yarn (F2);
- 10 c. when the first spool (R1) of elastic yarn must be replaced with the second spool (R2) of elastic yarn, interrupting composite yarn (FC) feeding to said developing cop (BC) and replacing the developing cop with a new tube (T);
- d. inserting the second elastic yarn (F2) in said interlacing jet (19)
- 15 to resume therewith the formation of said composite yarn (FC), said second elastic yarn (F2) being joined to said covering yarn (FT) which moves continuously;
- e. starting winding composite yarn on said new tube (T).

2. Method according to claim 1, characterized in that the first spool

20 (R1) is arranged in a working position and the second spool (R2) is arranged in a standby position, and that said second spool (R2) is carried to said working position and said first spool (R1) is removed from said working position when the first spool (R1) must be replaced.

3. Method according to claim 1, characterized by withholding the

25 initial free end of said second elastic yarn (F2) in a retaining member (27), before replacing inserting the second elastic yarn (F2) in said interlacing jet (19).

4. Method according to claim 1, characterized by collecting at least the covering yarn (FT) fed via said interlacing jet (19) during the time elapsing

30 between the winding interruption of the developing cop (BC) and the start of winding of the composite yarn on said new tube (T).

5. Method according to one or more of the preceding claims, characterized in that said second elastic yarn (F2) is joined to the covering yarn (FT) in said interlacing jet (19).

6. Method according to claims 3 and 5, characterized in that the initial free end of the second elastic yarn (F2) is withheld by said retaining member (27) downstream of the interlacing jet (19), with respect to the direction of feeding of the yarn through said interlacing jet (19).

5 7. Method according to one or more of the preceding claims, characterized in that said covering yarn (FT) is a multiple filament yarn.

8. Method according to one or more of the preceding claims, characterized in that said covering yarn (FT) is textured.

9. Method according to claim 8, characterized in that said covering
10 yarn (FT) is fed along a feeding path from a feeding cop (B1) to said interlacing jet (19) and textured along said feeding path.

10. Method according to one or more of the preceding claims, characterized by detecting the end of the first elastic yarn (F1), and by stopping the feeding of the composite yarn (FC) to the developing cop (BC)
15 and introducing the second elastic yarn (F2) in said interlacing jet upon detection of the end of the first elastic yarn (F1).

11. Method according to one or more of the preceding claims, characterized in that the covering yarn (FT), which is continuously fed, is collected by being sucked into a suction conduit (66) between stopping
20 feeding composite yarn (FC) to the developing cop (BC) and starting winding composite yarn on a new tube (T).

12. Method according to one or more of the preceding claims, characterized in that at least said first elastic yarn (F1) is stretched before being fed to said interlacing jet (19).

25 13. Method according to claim 12, characterized in that said covering yarn (FT) and said first elastic yarn (F1) are passed side by side in a stretching area (13) upstream of the interlacing jet (19) and fed from said stretching area to the interlacing jet along a common feeding path.

14. Method according to claim 13, characterized in that in said
30 stretching area, the first elastic yarn (F1) and the covering yarn (FT) are passed through a nip formed by two stretching rollers (15, 17).

15. Method according to claims 3 and 13, characterized in that: the initial free end of the second elastic yarn (F2) is withheld by said retaining member (27) downstream to the interlacing jet with respect to the feeding

direction of the yarn through said interlacing jet; a portion of the second elastic yarn (F2) is arranged alongside the first elastic yarn (F1) and the covering yarn (FT) between the stretching area (13) and the interlacing jet (19); and the second elastic yarn (F2) is pushed into said stretching area (13) by the side of the covering yarn (FT) when feeding of the second elastic yarn (F2) to said interlacing jet is started.

16. Method according to one or more of the preceding claims, characterized in that the spool from which the elastic yarn is fed to the interlacing jet is kept into rotation around its axis to unwind the yarn.

10 17. Method according to one or more of claims 1 to 15, characterized in that the elastic yarn is unwound from the spool without rotating said spool around its axis.

18. A device for the production of a composite yarn (FC), comprising at least one elastic yarn (F1, F2) covered by at least one covering yarn (FT), comprising in combination:

- an interlacing jet (19) for reciprocally joining the covering yarn (FT) and the elastic yarn (F1, F2);
- a feeding path of said covering yarn (FT) and a feeding path of said elastic yarn (F1; F2) to said interlacing jet (19);
- 20 - supporting means (37A, 37B) for spools (R1, R2) of elastic yarn;
- winding members (54, 55, 56) for winding the composite yarn (FC) on a developing cop (BC);
- a device for interrupting (57) the feeding of composite yarn (FC) to said developing cop (BC) and starting the winding of the composite yarn on a new winding tube (T);

25 characterized in that: said supporting means (37A, 37B) for the spools of elastic yarn are suitable for arranging at least a first spool (R1) of elastic yarn and at least a second spool (R2) of elastic yarn; and that a retaining member (27) is arranged near said interlacing jet (19) to withhold an initial free end of the elastic yarn of said second spool (R2) while the yarn from said first spool is fed to said interlacing jet; and that means for introducing the elastic yarn of said second spool (R2) in said interlacing jet (19) are provided.

30 19. Device according to claim 18, characterized by a collection member (66) for collecting the covering yarn (FT) which is fed substantially

continuously while the complete cop (BC) of composite yarn is replaced with a new winding tube (T), said collection member (66).

20. Device according to claim 19, characterized in that said collection member (66) is associated to said interrupting device (57).

5 21. Device according to claim 18, 19 or 20, characterized in that said spool supporting means (37A, 37B) are designed and arranged to support said first spool (R1) in a working position and said second spool (R2) in a standby position and to transfer said second spool (R2) from said standby position to said working position when said second spool (R2) must replace
10 said first spool (R1).

22. Device according to claim 21, characterized in that said spool supporting means (37A, 37B) are provided with a translating movement from said standby position to said working position.

23. Device according to one or more of claims 18 to 22,
15 characterized in that at least one texturing station (3) is arranged along the feeding path of the covering yarn.

24. Device according to one or more of claim 18 to 23, characterized in that said retaining member (27) of the initial free end of the elastic yarn (F2) of said second spool (R2) is combined with an introducing means (29, 31) for
20 inserting said elastic yarn in the interlacing jet (19).

25. Device according to one or more of claims 18 to 24 characterized in that said retaining member (27) is equipped with a movement for inserting said elastic yarn (F2) in said interlacing jet.

26. Device according to claim 23 or 25, characterized in that said
25 retaining member is arranged downstream of said interlacing jet (19) with respect to the feeding direction of the yarn.

27. Device according to one or more of claims 18 to 26, characterized in that it comprises a sensor (59) for generating a signal for starting the replacement procedure of the first spool (R1) of elastic yarn (F1)
30 and replacing it with a second spool (R2) of elastic yarn.

28. Device according to claim 27, characterized in that said sensor (59) detects the end of the elastic yarn (F1) of said first spool (R1).

29. Device according to one or more of claims 18 to 28, characterized in that said collecting member (66) of the covering yarn (FT)

comprises a suction member.

30. Device according to one or more of claims 18 to 29, characterized in that it comprises a stretching unit crossed by said covering yarn (FT) and by said elastic yarn (F1, F2), upstream to said interlacing jet
5 (19).

31. Device according to claim 30, characterized in that said stretching unit comprises a pair of stretching rollers (15, 17) forming a nip crossed by said covering yarn (FT) and the elastic yarn (F1) from said first spool (R1).

10 32. Device according to claim 30 or 31, characterized by an inserting element (49A, 49B; 51A, 51B), which inserts the elastic yarn (F2) of said second spool (R2) inside said stretching unit (15, 17).

33. Device according to one or more of claims 18 to 31, characterized in that said interlacing jet (19) comprises a cover (23) which is
15 opened to insert the elastic yarn (F2) from said second spool (R2).

34. Device according to one or more of claims 18 to 33, characterized in that a member for joining the head of an elastic yarn (F2) to the covering yarn (FT) is arranged upstream to said interlacing jet.

35. Device according to claim 34, characterized in that said joining
20 member consists of an auxiliary interlacing jet.

36. Device according at least to claim 30, characterized in that an oven (11) crossed by said covering yarn is arranged along the path of said covering yarn, upstream of said stretching unit (13) for stabilizing the yarn.


37. Device according to one or more of claims 18 to 36,
25 characterized in that an unwinding means is provided to rotate the spool from which the elastic yarn is fed to said interlacing jet.

38. Device according to claim 37, characterized in that said unwinding means is an unwinding roller in contact with the outer surface of the spool being unwound.

30


1 / 8

Fig.1

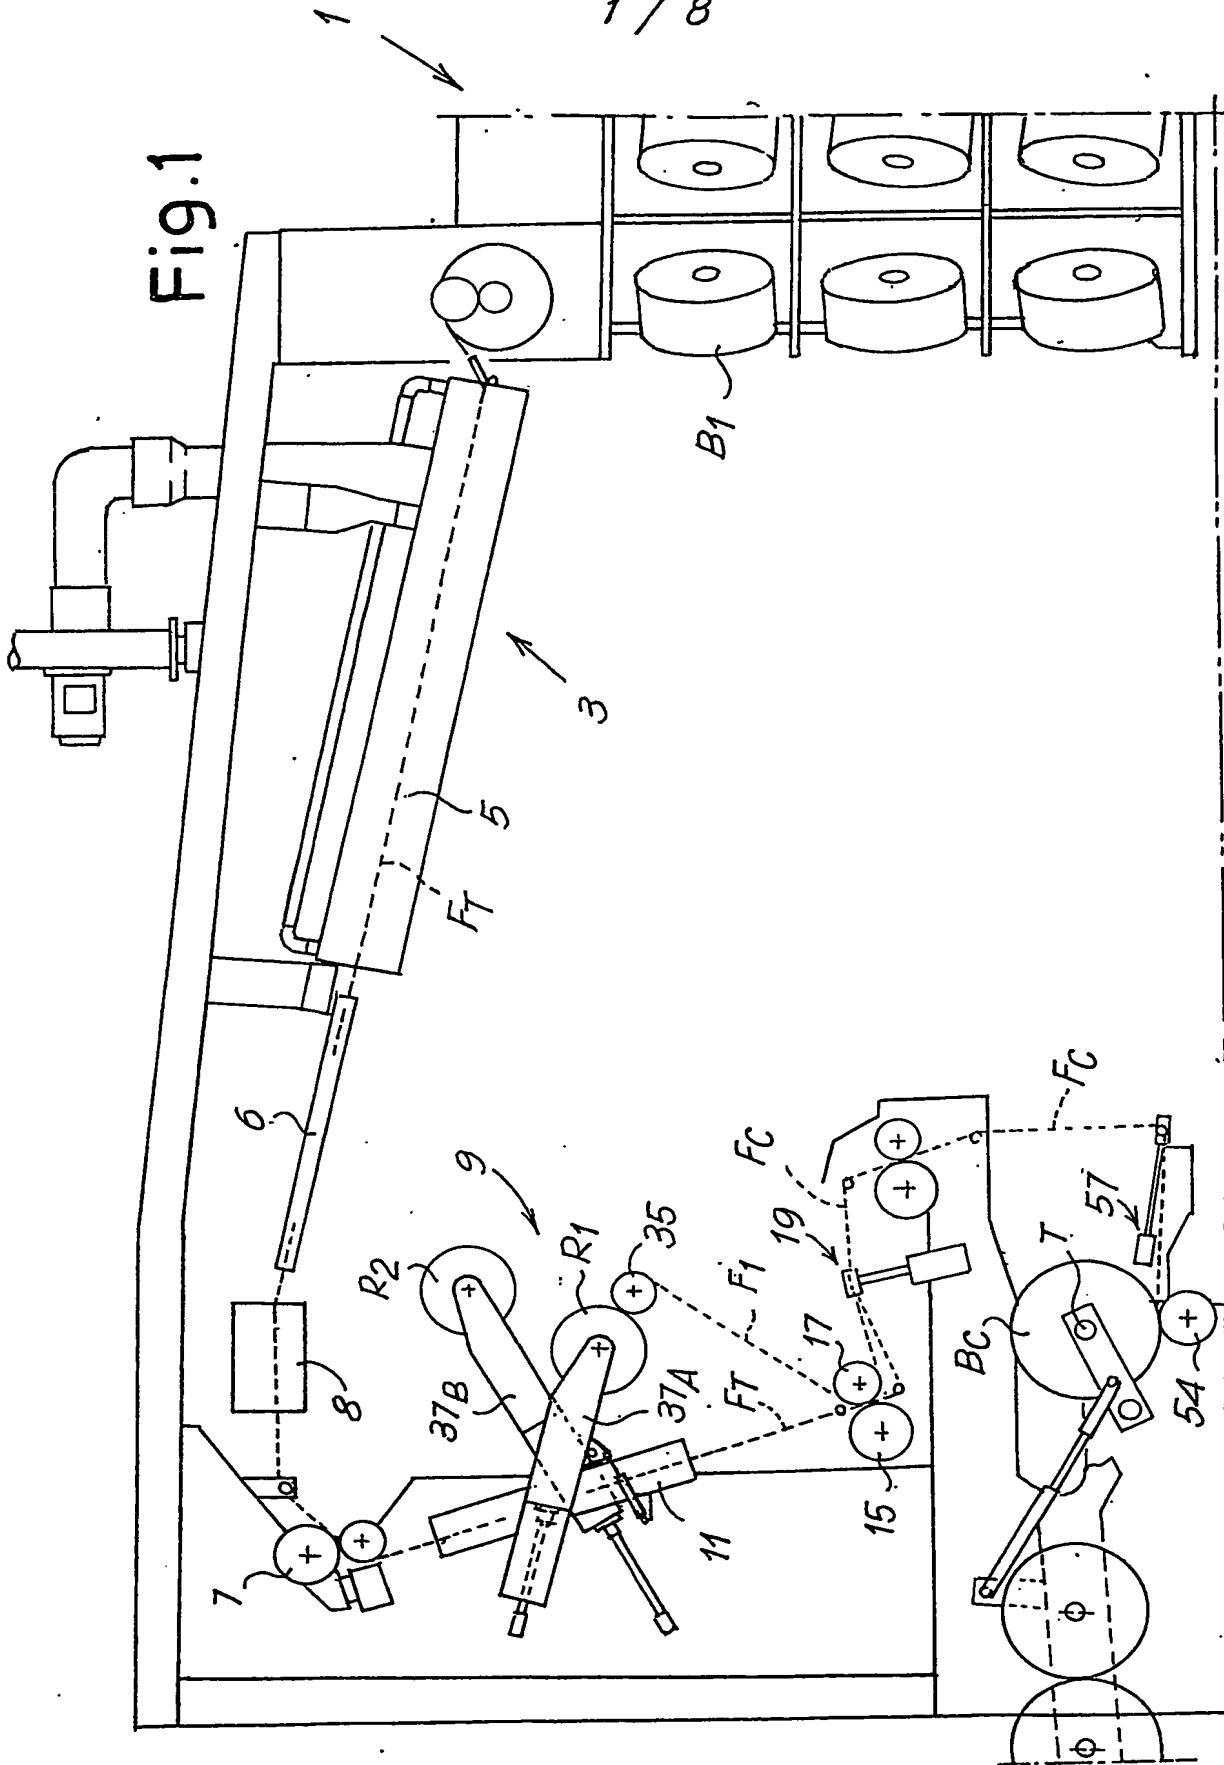

2 / 8

Fig. 2

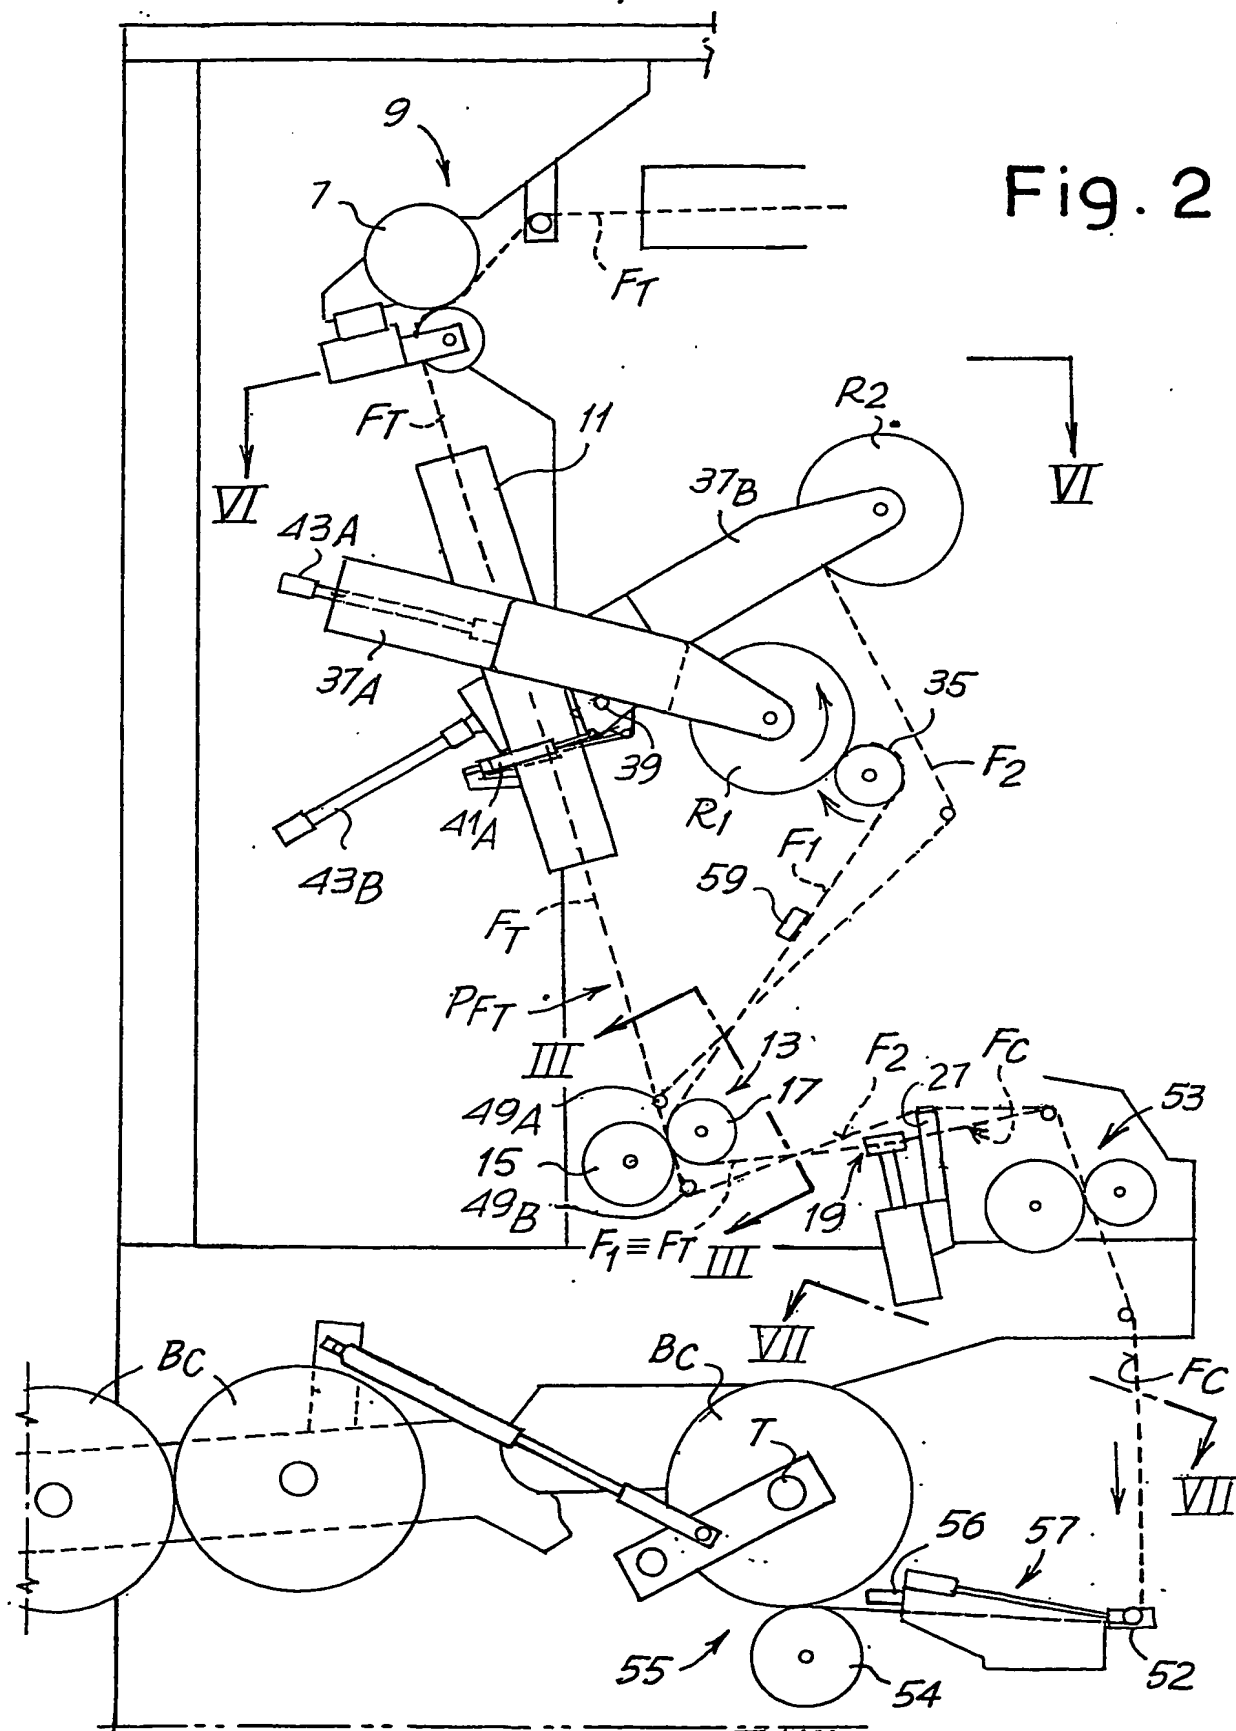

3 / 8.

Fig. 3

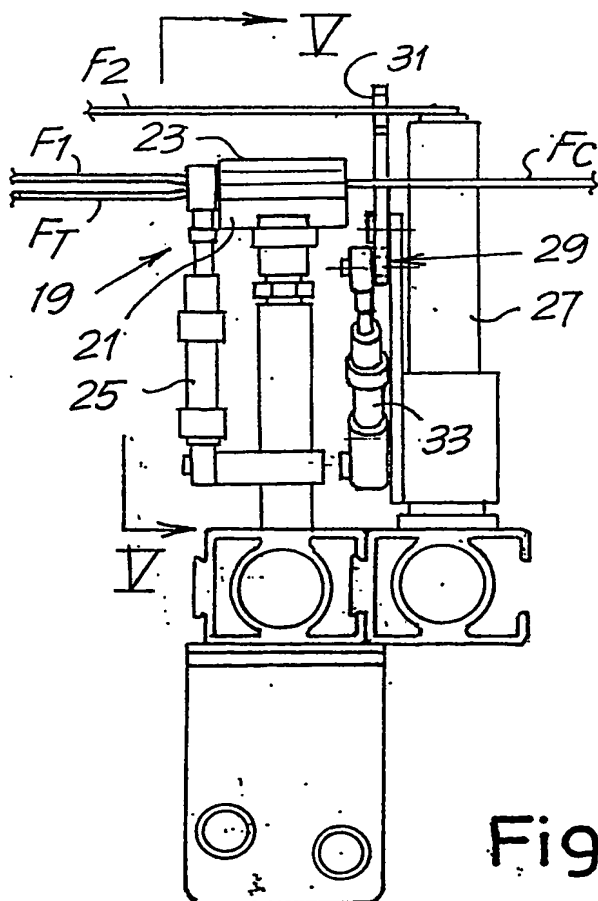
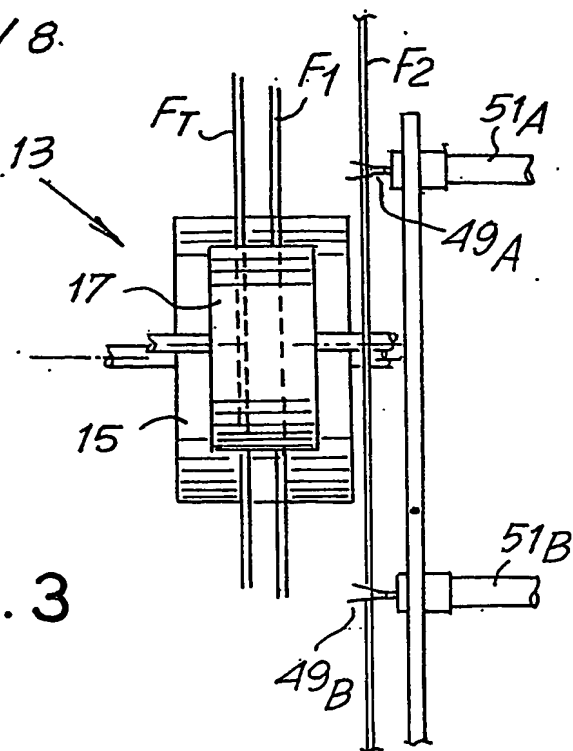


Fig. 4A

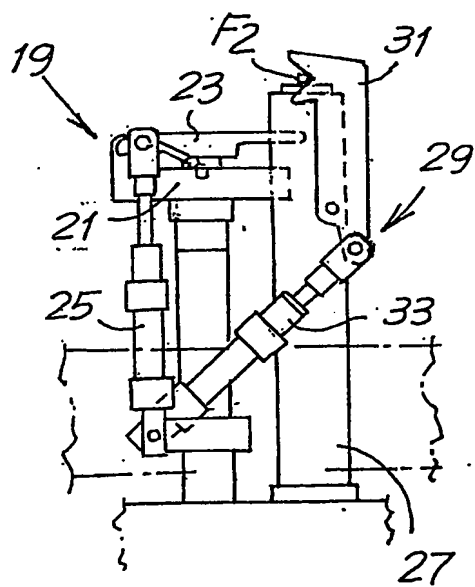


Fig. 5A

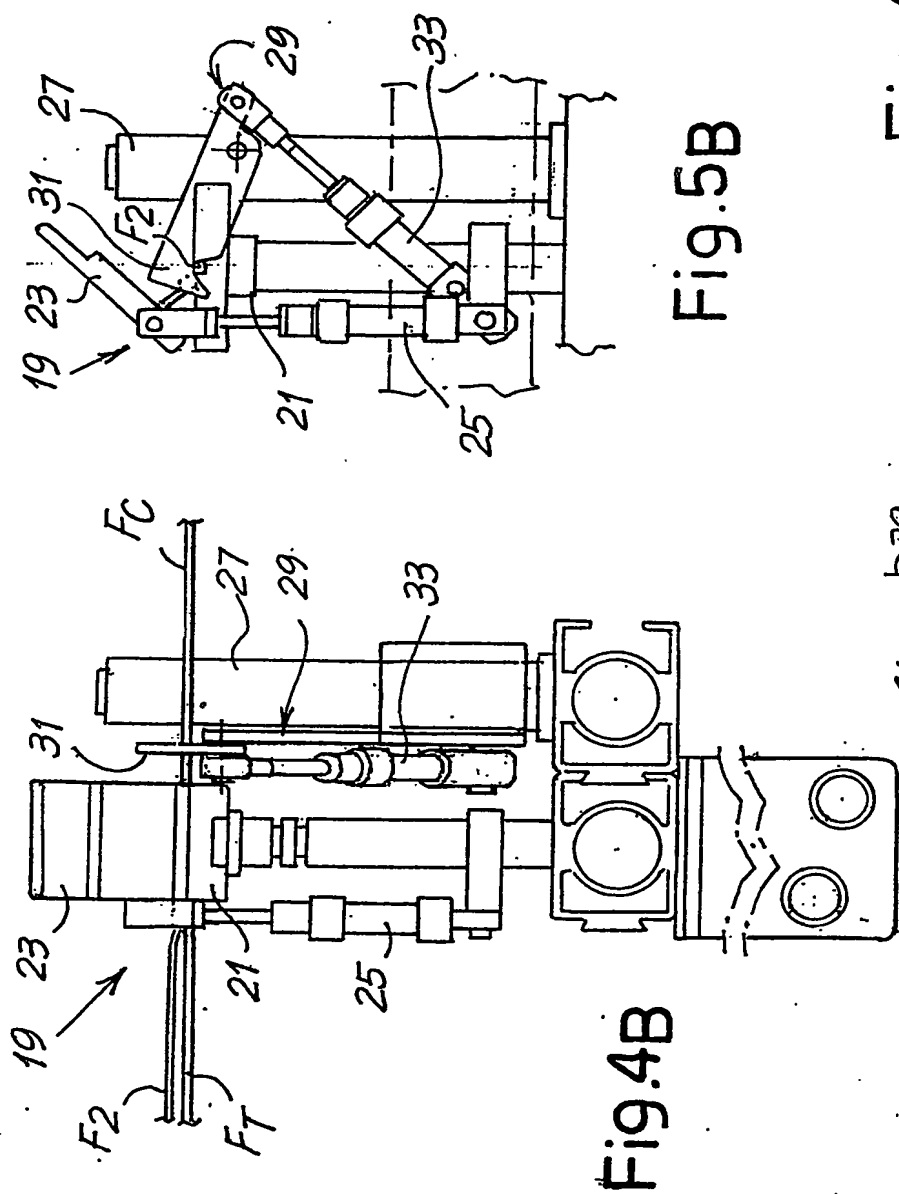


Fig. 5B

Fig. 4B


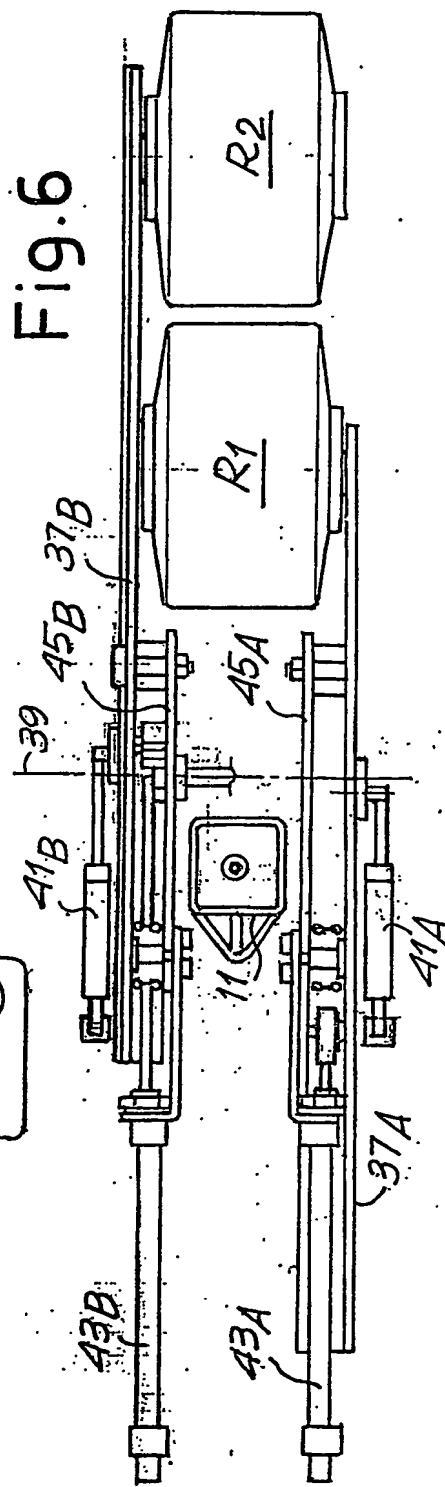


Fig. 6

5 / 8

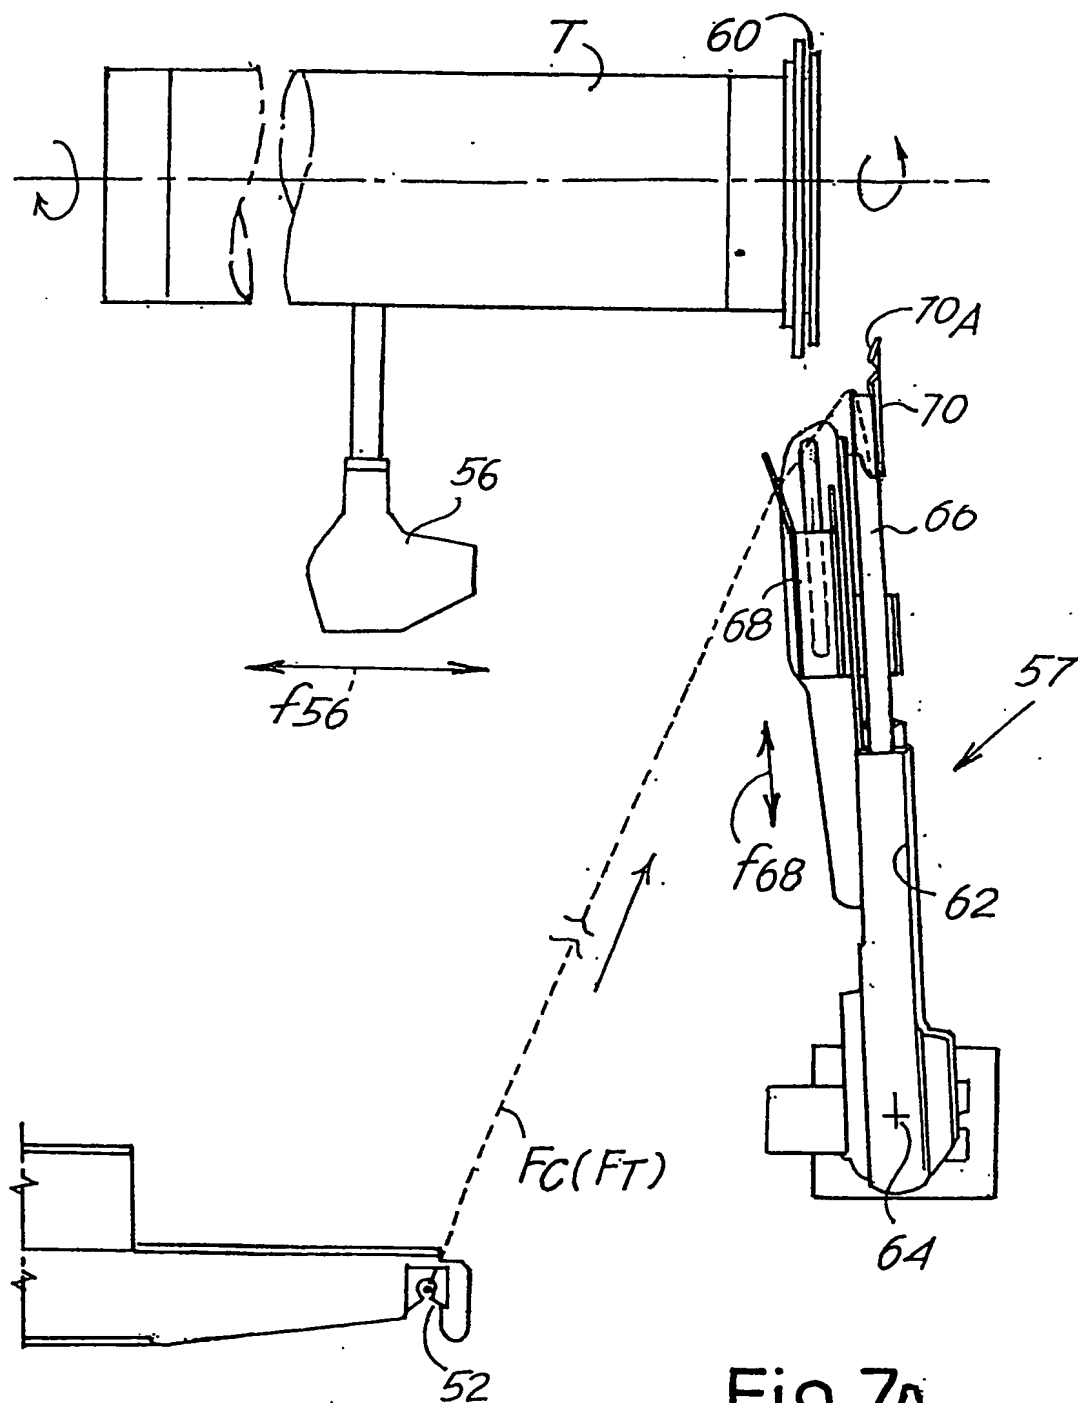

6 / 8


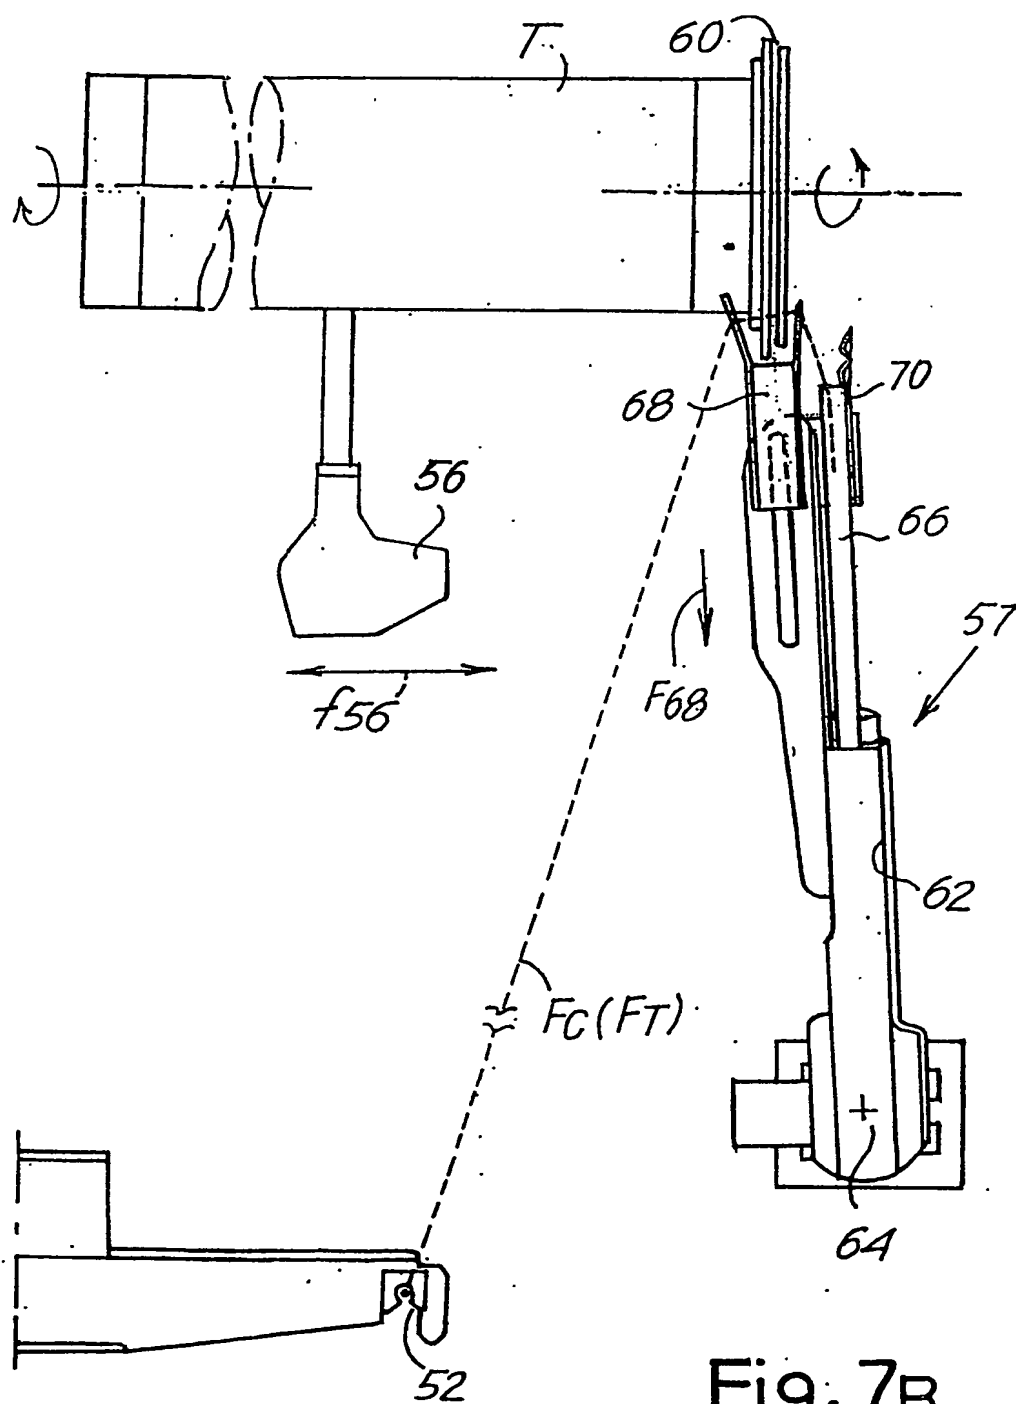


Fig. 7B

7 / 8

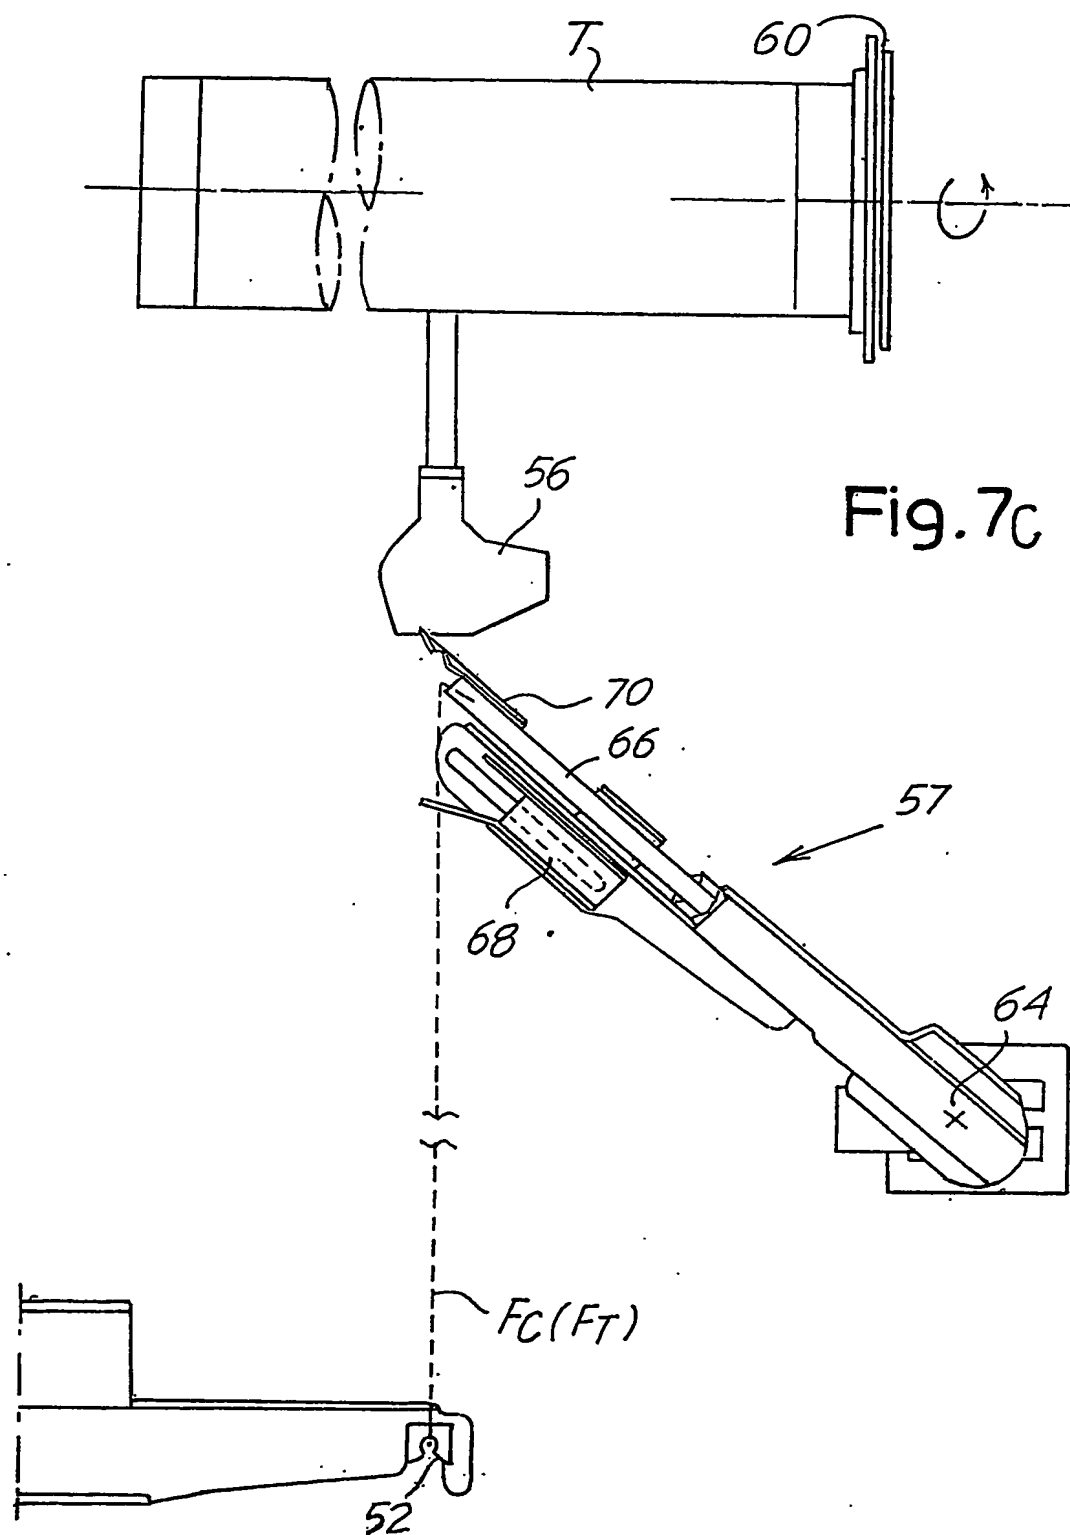

8 / 8

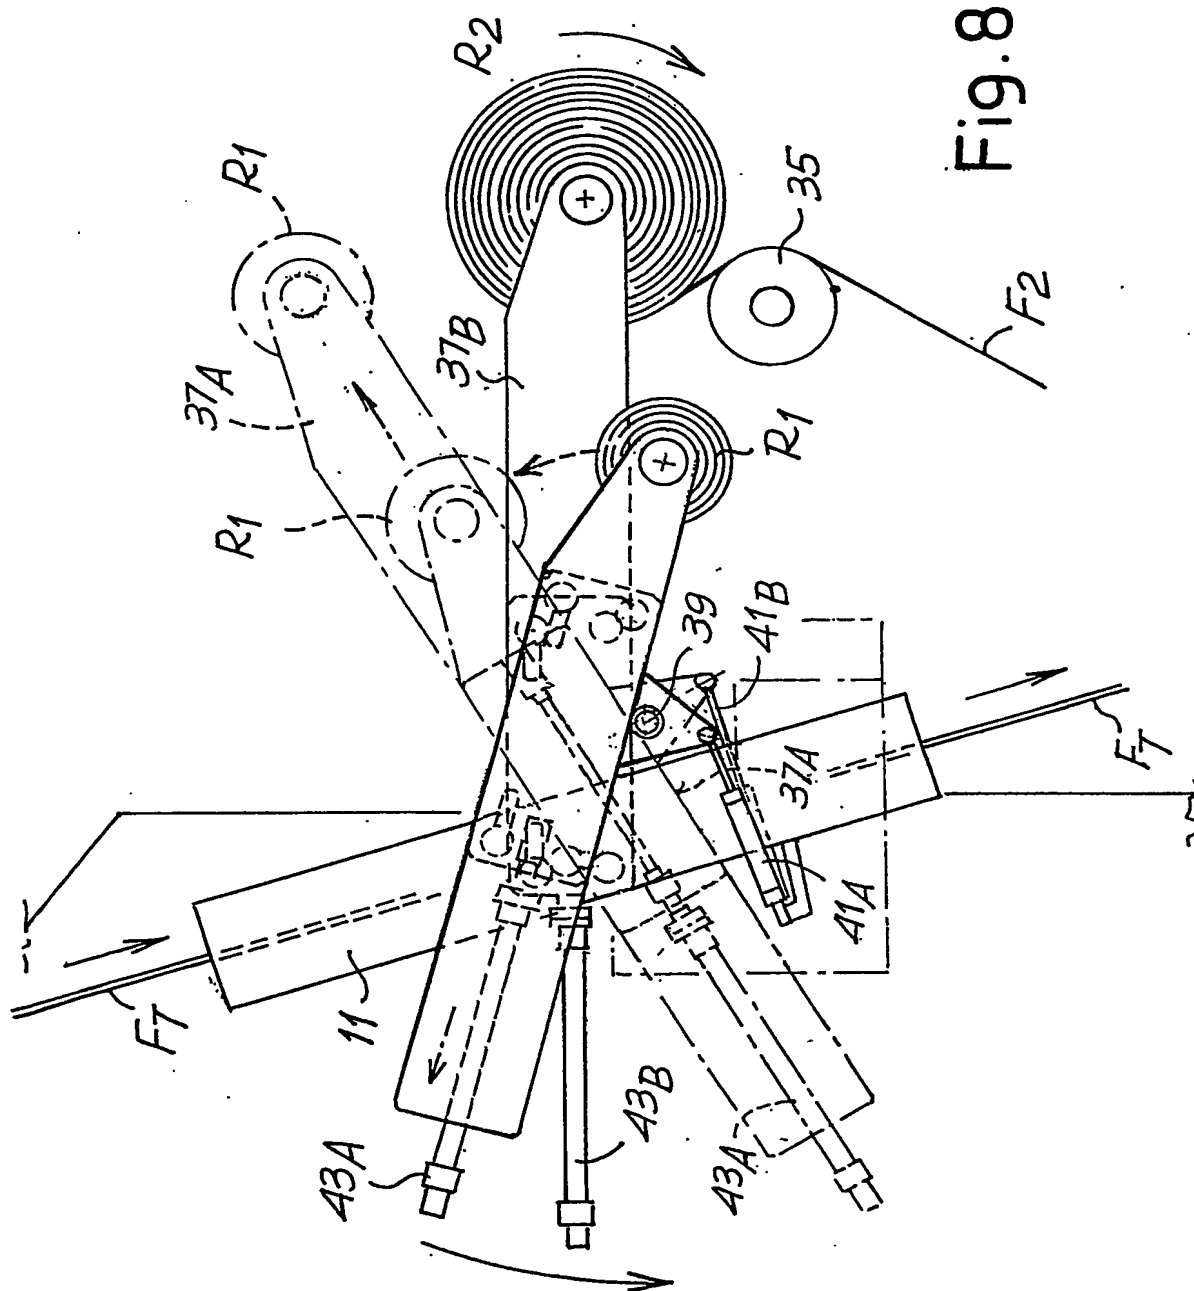


Fig. 8

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 03/00633

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B65H67/04 D02J1/08 D02G1/16 D02G3/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B65H D02J D02G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 829 757 A (CANTON ARMANDO) 16 May 1989 (1989-05-16) cited in the application column 10, line 26-61; figure 12 ---	1, 18
A	EP 0 985 621 A (MURATA MACHINERY LTD) 15 March 2000 (2000-03-15) column 2, line 51 -column 4, line 27 ---	1, 18
A	EP 0 359 453 A (ASAHI CHEMICAL IND) 21 March 1990 (1990-03-21) the whole document ---	1, 18
A	US 4 015 786 A (SLAVIK VALTER ET AL) 5 April 1977 (1977-04-05) the whole document -----	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

12 February 2004

Date of mailing of the international search report

26/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

V Beurden-Hopkins, S

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 03/00633

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4829757	A	16-05-1989	IT 1198167 B	21-12-1988
			IT 1223114 B	12-09-1990
			DE 3789006 D1	17-03-1994
			DE 3789006 T2	01-09-1994
			EP 0269184 A2	01-06-1988
			ES 2048732 T3	01-04-1994
			IL 84579 A	17-09-1990
			JP 63219640 A	13-09-1988
			KR 9008261 B1	10-11-1990
			RU 2015219 C1	30-06-1994
EP 0985621	A	15-03-2000	JP 3440839 B2	25-08-2003
			JP 2000086090 A	28-03-2000
			EP 0985621 A2	15-03-2000
EP 0359453	A	21-03-1990	JP 2070675 A	09-03-1990
			JP 2620325 B2	11-06-1997
			DE 68910762 D1	23-12-1993
			DE 68910762 T2	31-03-1994
			EP 0359453 A2	21-03-1990
			ES 2046488 T3	01-02-1994
			JP 2842633 B2	06-01-1999
			JP 3111380 A	13-05-1991
			KR 9401580 B1	25-02-1994
			US 5308004 A	03-05-1994
US 4015786	A	05-04-1977	CH 570337 A5	15-12-1975
			DE 2502946 A1	07-08-1975
			FR 2259776 A1	29-08-1975
			GB 1444883 A	04-08-1976
			JP 50112532 A	04-09-1975